




POCINKOVANE TRAKE

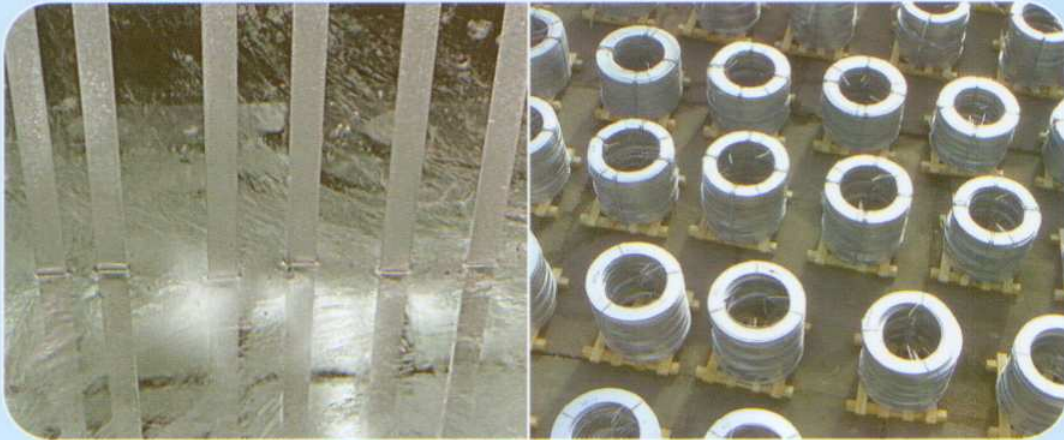

Parametri				
Širina (mm) (a)	Debljina (g)			
	2 mm	3 mm	4 mm	5 mm
Težina (kg/duž.m)				
20	0,320	0,480	0,640	0,800
25	0,400	0,600	0,800	1,000
30	0,480	0,721	0,961	1,200
35	0,561	0,840	1,122	1,397
40	0,640	0,961	1,285	1,601
45	0,721	1,081	1,438	1,805
50	0,800	1,200	1,601	1,999

Opis izrade:

- izrada prema PN-EN 50164-2
- šaržirni materijal: toplovaljan čelik
- krugovi standard od 25 kg do 50 kg
- isporuka nevezano ili na paletama

